

DATASHEET - SL 150 SERIES COMBINED PRODUCTS

AUDIBLE & VISUAL SIGNALLING EQUIPMENT



DESCRIPTION - SL 150 series combined

This combined is certified for use in Atex/explosive atmosphere, zone 1 & 2 for gas and zone 21 & 22 for dust. It is dedicated for Oil & Gas, chemical, petrochemical, pharmacy industries, marine and Offshore applications. It's designed for corrosive environments and hazardous area.

The set is provided with 5 beacons maximum.

The beacon can be delivered with two different light sources;
LED with steady, rotary, fixed or blinking led of different powers.
Flashing with XENON tube of different powers.
Four flashing frequencies are selectable.

Optional it is possible to control the beacon via a telephone line. On demand one of the beacons can be replaced by a push button or a junction box. The set is assembled on a stainless steel 316L frame.

Housing is moulded in Glass-Reinforced Polyester (GRP), dyed in the mass and protected by an UV resistant paint.

The lens is made with borosilicate glass 3.3.

A complete range of accessories is available to customize a products. (see accessories annex)




- zone 1 & 2
- zone 21 & 22

PRODUCT CODE CONFIGURATOR

| COMBINATION TYPE | LENS COLOUR | TYPE | POWER | VOLTAGE | DUTY LABEL | TAG LABEL | LENS GUARD | CABLE ENTRY | FINISH COLOUR | TEL. INIT. |
|----------------------------------|-------------|--------------|------------------------------|-----------------------|------------|------------|------------|-----------------|---------------|------------|
| A20 - 2 BEACONS | ■ R = RED | X = XENON | 05 LED: 5W XENON: 5J | DC 12 .. 48V DC | Y = YES | Y = YES | Y = YES | A = M20 | ■ RD = RED | Y = YES |
| B30 - 3 BEACONS | | | 10 LED: 10W XENON: 10J | AC1 12..48V AC | | | | B = M25 | | |
| B3J - 2 BEACONS & 1 JUNCTION BOX | ■ A = AMBER | L = LED | 15 XENON: 15J | AC 100 .. 240V AC | N = NO | N = NO | N = NO | C = 1/2" NPT | ■ BU = BLUE | N = NO |
| B3P - 2 BEACONS & 1 PUSH BUTTON | ■ B = BLUE | | 21 XENON: 21J | OR (OTHER REQUEST) | | | | D = 3/4" NPT | ■ BL = BLACK | |
| C40 - 4 BEACONS | ■ G = GREEN | | C = CLEAR | | | | | | | |
| C4J - 3 BEACONS & 1 JUNCTION BOX | | | | | | | | | | |
| C4P - 3 BEACONS & 1 PUSH BUTTON | | | | | | | | | | |
| D50 - 5 BEACONS | | | | | | | | | | |
| D5J - 4 BEACONS & 1 JUNCTION BOX | | | | | | | | | | |
| D5P - 4 BEACONS & 1 PUSH BUTTON | | | | | | | | | | |

ADD THE CODES RELATED TO THE FEATURES REQUIRED TO SL 150-:


| | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|

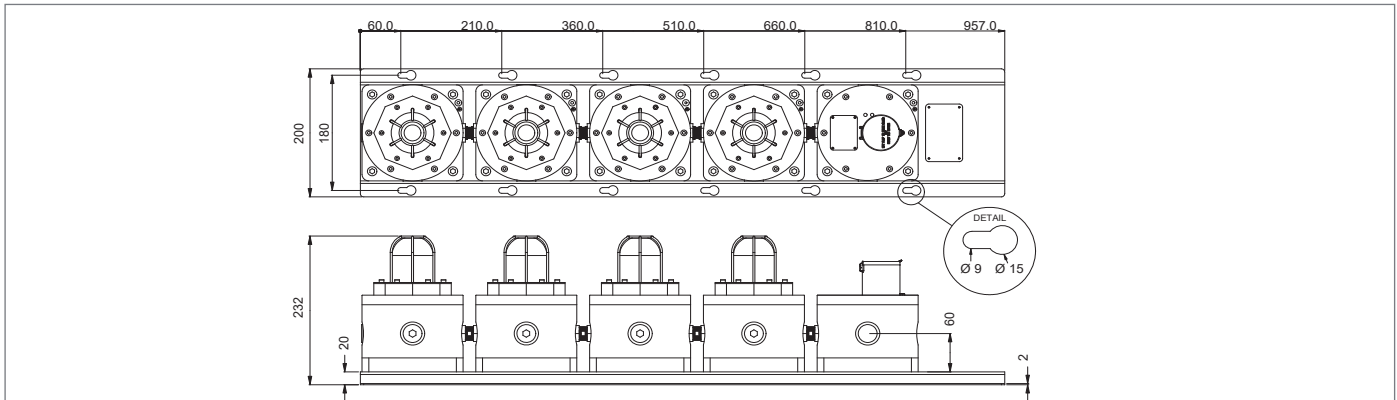

DATASHEET - SL 150 SERIES COMBINED PRODUCTS

AUDIBLE & VISUAL SIGNALLING EQUIPMENT

TECHNICAL DATA

| MATERIAL | <ul style="list-style-type: none"> • ENCLOSURE : Glass Reinforced Polyester • LENS: Tempered borosilicate glass 3.3 • FRAME: Stainless Steel 316L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|--------|--------|---------|---------|---------|---------|-------------|--------|--------|--------|-------|-------|--------------|---------|--------|--------|--------|-------|--------------|---------|--------|--------|--------|-------|--------------|----|--------|--------|--------|--------|
| COLOUR | • RED : RAL 3001 - YELLOW** : RAL1018 - BLUE** : RAL5005 - BLACK** : RAL9005 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| INGRESS PROTECTION | • IP66/67 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AMBIENT TEMPERATURE FOR OPERATION | • T6 = - 40°C ~ + 55°C , T5 = - 40°C ~ + 60°C, T4 = - 40°C ~ + 70°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CERTIFICATION | • Nemko 13 ATEX 1566X, IECEx NEM 13.0036X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| EX CODE | •  II 2 GD Ex d IIC T4 ~ T6 Gb, Ex tb IIIC T135°C ~T85°C, | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| STANDARD | • EN / IEC 60079-0, EN / IEC 60079-1, EN / IEC 60079-31, | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ATEX AREA ZONE | • Gas zone : 1 & 2 Dust zone : 21 & 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CANDELA LENS COLOR | • Red : 0.15 • Amber : 0.51 • Blue : 0.12 • Green : 0.49 • Clear : 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LIGHT TYPE | Flash tube (XENON) LED | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TRUE LIGHT INTENSITY | <ul style="list-style-type: none"> • 5 joules = 109 Cd • 10 joules = 293 Cd • 5 W = 128 Cd • 10W = 312 Cd • 15 joules = 395 cd • 21 joules = 424 Cd | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PEAK LIGHT INTENSITY | <ul style="list-style-type: none"> • 5 joules = 35970 Cd • 10 joules = 66804 Cd • 15 joules = 83345 Cd • 21 joules = 95824 Cd | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TIME LIFE | • Emissions are reduced to 70% after 8 million flashes • >50 000 hours without luminosity decreasing | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLINKING OR ROTARY FREQUENCY (0 = steady status) | <ul style="list-style-type: none"> • 60/80/120 times/min • 100/120/150 times/min • 120/150/180 times/min • 60/75/0 times/min • 60/75/100 times/min • 75/95/0 times/min • 75/95/120 times/min | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CONSUMPTION BEACON | <ul style="list-style-type: none"> • 5 Joules = 10W • 10 Joules = 15W • 5W • 10W • 15 Joules = 20W • 21 Joules = 25W | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AMBIENT HUMIDITY* | • until 95%* | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| POWER SUPPLY | • 12-48V DC • 12-48V AC (50/60hz) • 100-240V AC (50/60hz) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RATED IMPULSE WITHSTAND VOLTAGE | • 1kV following IEC 61000-4-5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| WORKING CURRENT LED | <table border="1"> <thead> <tr> <th>Power</th> <th>12V DC</th> <th>24V DC</th> <th>48V DC</th> <th>110V AC</th> <th>220V AC</th> </tr> </thead> <tbody> <tr> <td>• 5W</td> <td>530 mA</td> <td>260 mA</td> <td>120 mA</td> <td>80 mA</td> <td>40 mA</td> </tr> <tr> <td>• 10W</td> <td>1100 mA</td> <td>530 mA</td> <td>240 mA</td> <td>160 mA</td> <td>80 mA</td> </tr> </tbody> </table> | Power | 12V DC | 24V DC | 48V DC | 110V AC | 220V AC | • 5W | 530 mA | 260 mA | 120 mA | 80 mA | 40 mA | • 10W | 1100 mA | 530 mA | 240 mA | 160 mA | 80 mA | | | | | | | | | | | | |
| Power | 12V DC | 24V DC | 48V DC | 110V AC | 220V AC | | | | | | | | | | | | | | | | | | | | | | | | | | |
| • 5W | 530 mA | 260 mA | 120 mA | 80 mA | 40 mA | | | | | | | | | | | | | | | | | | | | | | | | | | |
| • 10W | 1100 mA | 530 mA | 240 mA | 160 mA | 80 mA | | | | | | | | | | | | | | | | | | | | | | | | | | |
| WORKING CURRENT XENON | <table border="1"> <thead> <tr> <th>Energy</th> <th>12V DC</th> <th>24V DC</th> <th>48V DC</th> <th>110V AC</th> <th>220V AC</th> </tr> </thead> <tbody> <tr> <td>• 5J</td> <td>460 mA</td> <td>280 mA</td> <td>140 mA</td> <td>60 mA</td> <td>35 mA</td> </tr> <tr> <td>• 10J</td> <td>850 mA</td> <td>490 mA</td> <td>250 mA</td> <td>100 mA</td> <td>60 mA</td> </tr> <tr> <td>• 15J</td> <td>1200 mA</td> <td>700 mA</td> <td>360 mA</td> <td>140 mA</td> <td>80 mA</td> </tr> <tr> <td>• 21J</td> <td>NA</td> <td>960 mA</td> <td>480 mA</td> <td>180 mA</td> <td>110 mA</td> </tr> </tbody> </table> | Energy | 12V DC | 24V DC | 48V DC | 110V AC | 220V AC | • 5J | 460 mA | 280 mA | 140 mA | 60 mA | 35 mA | • 10J | 850 mA | 490 mA | 250 mA | 100 mA | 60 mA | • 15J | 1200 mA | 700 mA | 360 mA | 140 mA | 80 mA | • 21J | NA | 960 mA | 480 mA | 180 mA | 110 mA |
| Energy | 12V DC | 24V DC | 48V DC | 110V AC | 220V AC | | | | | | | | | | | | | | | | | | | | | | | | | | |
| • 5J | 460 mA | 280 mA | 140 mA | 60 mA | 35 mA | | | | | | | | | | | | | | | | | | | | | | | | | | |
| • 10J | 850 mA | 490 mA | 250 mA | 100 mA | 60 mA | | | | | | | | | | | | | | | | | | | | | | | | | | |
| • 15J | 1200 mA | 700 mA | 360 mA | 140 mA | 80 mA | | | | | | | | | | | | | | | | | | | | | | | | | | |
| • 21J | NA | 960 mA | 480 mA | 180 mA | 110 mA | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CABLES ENTRY | • 2 x M20, M25**, 1/2" NPT**, 3/4" NPT** or other** (Specify) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TERMINAL | • From 22 to 14 AWG - from 0.50 mm ² to 2.5 mm ² | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NET WEIGHT | • SL150-A : 10.2 Kg, SL150-B : 15 Kg, SL150-C : 20.2 Kg, SL150-D : 23.90 Kg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| EXTERNAL TRIGGER** | • 25Hz <f<50Hz 40V<u<100V Z = 2k Ohms | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

* = without runoff - ** = optional - cable gland and blind plug not provided

MEANING OF LENS COLOR USAGE IN THE INTERNATIONAL STANDARD (IEC 60073)

| COLOR | MEANING | ACTION | EXAMPLE |
|---------|-------------------------|---|--|
| ■ RED | EMERGENT | Dangerous state Take immediat action | • Pressure/Temperature beyond the safe state - Shutdown due to the action of protective devices - Fire alarm - Equipment failure alarm |
| ■ AMBER | ABNORMAL | Abnormal state, near the critical status | • Pressure/Temperature above the normal range - Protective device released - Toxic and harmful gases release alarm |
| ■ GREEN | SAFE | Normal state | • Pressure/Temperature in normal state - Automatic control system is operating normally |
| ■ BLUE | MANDATORY | Requires operator's action | • Emergency evacuation - Abandon rescue and escape - Abandon platform or abandon ship - Enter the command |
| ■ CLEAR | NO SPECIAL SIGNIFICANCE | If uncertainty for other colors, clear is allowed to be used | • General information - Can't exactly use red, yellow, green or blue - Used for the implementation of command - Indicate the measured values |